


979 Saddle Trax™



- Ergonomic benefit of 25,4 mm thickness worker platform, it's long wearing top surface (4,7 mm) is laminated on to a resilient microcellular vinyl base for maximum durability coupled with fatigue relief.
- Durability, comfort and safety are united in this popular product, designed for those who are not willing to compromise in any of these criteria.
- RedStop™ technology, engineered to increase friction with smooth floor surfaces anchoring the mat in place.
- Certified by the National Floor Safety Institute (NFSI).
- Diamond plate pattern provides traction while allowing easy twist turns.
- Uni-Fusion™ technology, engineered to resist in the harshest work environments.
- Resistant to most industrial fluids and chemicals.
- All 4 sides are bevelled to minimize tripping.
- Available with yellow borders along sides comply with OSHA code 1910-144.
- Free of toxic DOP and DMF.

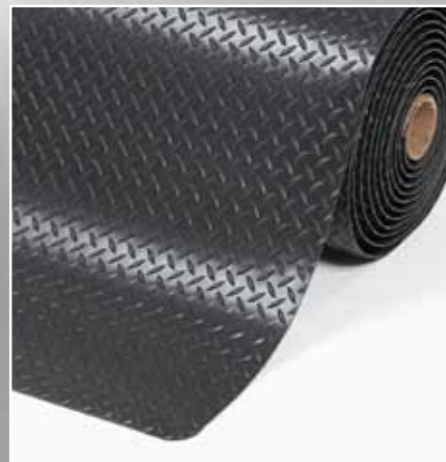

979 Saddle Trax™

PRODUCT SPECIFICATIONS			
Designation	Industrial matting		
Type	Anti-fatigue		
Description	Laminated with deckplate top surface		
Material	PVC on microcellular vinyl base		
Process	Laminated, Uni-Fusion™ technology		
Category	Best		
Recommended use	Heavy duty – dry industrial environments		
Colours	Black, Black/Yellow		
Weight	7.1 kg/m ²		
Thickness	25.4 mm		
Standard sizes	91 cm x 150 cm 91 cm x 3 m 91 cm x 6 m 91 cm x 22.8 m 122 cm x 22.8 m		
Custom sizes	91cm and 122cm per linear meter		
Special remarks			
PRODUCT TESTING			
Tests		Norms	Results
Compression deflection	1.4 Kg/cm ²	U.S.	2.07 cm
	2.8 Kg/cm ²		1.70 cm
Foam battery		ASTM D3574	
Abrasion resistance		ASTM D3884-01	
	500 Cycles		
	1000 Cycles		0,24% weight loss
Static coefficient of friction		ASTM C1028-96	0.77
Elongation		ASTM D412	0.68%
Breaking load		ASTM D412	64 lb
Graves tear strength		ASTM D 1004	51.9 lb
Hardness		ASTM D2240-02	80 Shore A
Anti-slip		DIN 51130 and BG-RULE BGR181	
FIRE TESTING			
	Critical radiant flux	ASTM E-648	0.53 watts/cm ²
	Fire retardancy	DIN4102	
		EN 13501-1	
Flammability test	ASTM D2859	Pass	
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		<ul style="list-style-type: none"> • Recyclable material • 100% recycled PVC top surface • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 	