
422 Cushion Dek™ with Grip Step®





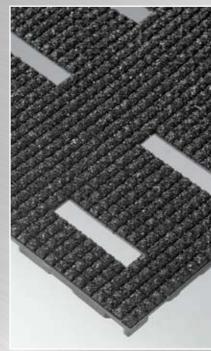

- Aggressive slip resistant surfaces with abrasive anti-slip coating.
- Slot perforations (13 mm x 48 mm) facilitate drainage of fluids, keeping the surface clean.
- Designed to withstand harsh chemicals, this mat offers simple solutions to almost any industrial or foodservice application.
- Made of tough PVC compound, designed to yield a long service life and resist to industrial oils.
- Easy roll-up and clean-up.
- Free of silicone therefore safe for vehicle painting facilities.
- Ergonomic benefit of 11 mm thickness worker platform
- Top surface with raised pyramid configuration enhances traction while channeling liquids.
- Free of toxic DOP and DMF.

422 Cushion Dek™ with Grip Step®

| | PF | RODUCT SPECIFICATIONS | | |
|--------------------------------|--|---|---------|--|
| Designation | Industrial Matting | | | |
| Туре | Anti-slip | | | |
| Description | Duckboard, pyramid configured top surface with slotted perforations, resistant to industrial oil | | | |
| Material | 100% PVC | | | |
| Process | Injection moulding | | | |
| Category | Good | | | |
| Recommended use | Medium duty – industrial environments, wet/dry areas – extremely slippery areas | | | |
| Colours | Black | | | |
| Weight | 6.5 kg/m ² | | | |
| Thickness | 11 mm | | | |
| Standard sizes | 91 cm x 122 cm 91 cm x 182 cm 91 cm x 300 cm 91 cm x 10 m | | | |
| Custom sizes | 60 cm, 91 cm, 122 cm, 182 | 60 cm, 91 cm, 122 cm, 182 cm per linear meter | | |
| Special remarks | With Grip Step® abrasive anti-slip coating | | | |
| | | PRODUCT TESTING | | |
| | Tests | Norms | Results | |
| Compression deflection | | U.S. | | |
| | 1.4 kg/cm ² | | 1.82 cm | |
| | 2.8 kg/cm ² | | 1.66 cm | |
| Foam battery | | ASTM D3574 | | |
| Abrasion resistance | | ASTM D3884-01 | | |
| | 500 Cycles | | | |
| | 5000 Cycles | | 0.57 | |
| Static coefficient of friction | | ASTM C1028-96 | | |
| Elongation | | ASTM D412 | | |
| Breaking load | | ASTM D412 | | |
| Graves tear strength | | ASTM D 1004 | | |
| Hardness | | ASTM D2240-02 | | |
| Anti-slip | | DIN 51130 and BG-RULE BGR181 | | |
| | | FIRE TESTING | | |
| | Critical radiant flux | ASTM E-648 | | |
| | Fire retardancy | DIN4102 | | |
| | | EN 13501-1 | | |
| | Flammability test | ASTM D2859 | | |
| ESD | | ANSI ESD S7.1 50% Humidity | | |
| Sustainability | | Recyclable material Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) | | |

