
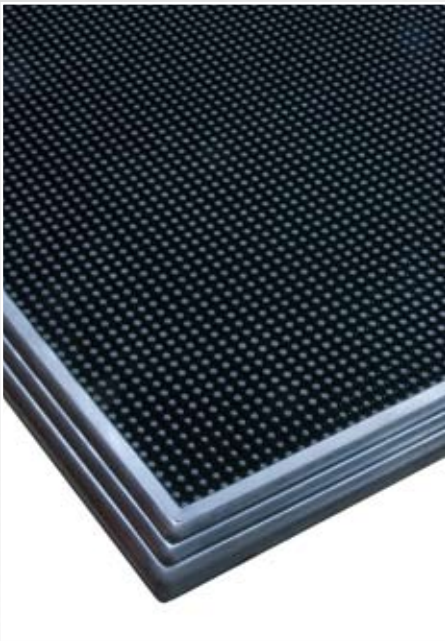


346 Sani-Trax™

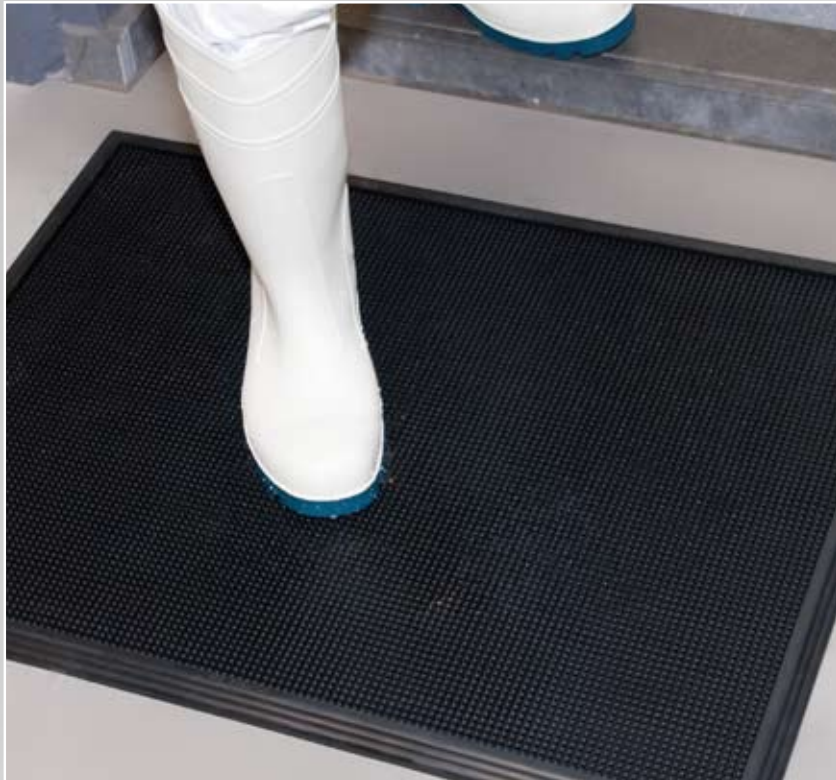

- This entrance disinfectant mat cleans and sanitizes shoes and is recommended at entrances to all food processing areas.
- Thousands of flexible fingers provide an automatic scrubbing action that dislodges contaminants from footwear. As traffic passes, rubber tips bend under pressure to immerse soles in disinfectant solution, a double action that keeps contamination from reaching food processing areas.
- Convenient mat size that fits most doorways.
- Suction cups on underside prevents mat from shifting.
- Natural rubber compound for general purpose applications, designed to resist to most chemicals and variations in temperature.
- Thick surrounding border stands >0,635 cm higher than finger-scrapers to contain liquid disinfectant. Mat holds 4½ liters of disinfectant solution.

| PRODUCT SPECIFICATIONS |                                                                                                                                                                                                                                       |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation            | Industrial matting                                                                                                                                                                                                                    |
| Type                   | Disinfectant entrance mat                                                                                                                                                                                                             |
| Description            | Disinfectant finger-tipped molded mat which allows most sanitizers and clean shoes at entrances.                                                                                                                                      |
| Material               | 100% natural rubber compound                                                                                                                                                                                                          |
| Process                | Compression moulding                                                                                                                                                                                                                  |
| Category               | Reversible lightweight mat                                                                                                                                                                                                            |
| Recommended use        | At doorways, starter rooms, packaging areas, laboratories, employee locker rooms, break rooms, refuse areas and receiving areas.<br>Any place where spread of contamination needs to be limited.                                      |
| Colours                | Black                                                                                                                                                                                                                                 |
| Weight                 | 10.8 kg/m²                                                                                                                                                                                                                            |
| Thickness              | 19 mm                                                                                                                                                                                                                                 |
| Standard sizes         | 61 cm x 81 cm                                                                                                                                                                                                                         |
| Accessories            | Not required                                                                                                                                                                                                                          |
| Special remarks        | Use quaternary ammonium, iodine, chlorine or any other sanitizer but always test its concentration. Most sanitizers are concentrated and must be diluted before use in a footbath. Follow label directions for appropriate dilutions. |

346 Sani-Trax™

| PRODUCT TESTING                                                   |                                                                                                                                                                        |                 |         |
|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| NSF TESTING                                                       |                                                                                                                                                                        | NSF/ANSI - 52   |         |
| Tensile/elongation                                                | ASTM D-412                                                                                                                                                             | Tensile         |         |
|                                                                   |                                                                                                                                                                        | Elongation      |         |
| Tear strength                                                     | ASTM D-624                                                                                                                                                             |                 |         |
| Specific gravity                                                  | ASTM D-792                                                                                                                                                             |                 |         |
| Resistance to fungi Bacillus subtillis ATC 27328                  | ASTM G-21                                                                                                                                                              |                 |         |
| Resistance to microorganisms Aspergillus niger                    |                                                                                                                                                                        |                 |         |
| Oil resistance                                                    |                                                                                                                                                                        |                 |         |
| Water resistance                                                  |                                                                                                                                                                        |                 |         |
| Temperature resistance (water=200°F)                              |                                                                                                                                                                        |                 |         |
| Temperature resistance (vegetable shortening=300°F)               |                                                                                                                                                                        |                 |         |
| Resistance to heated air                                          |                                                                                                                                                                        |                 |         |
| Mat weight                                                        | NSF Requirement < 40 lb                                                                                                                                                |                 |         |
|                                                                   |                                                                                                                                                                        | 61 cm x 81 cm   | 11,9 lb |
| ANTIBACTERIAL ACTIVITY TESTING                                    |                                                                                                                                                                        |                 |         |
| Activity assessment of textile materials : Parallel Streak Method |                                                                                                                                                                        |                 |         |
| Staphylococcus aureus ATCC 25923                                  | AATCC 147                                                                                                                                                              |                 |         |
| Pseudomonas aeruginosas ATCC 13388                                | ASTM G-22                                                                                                                                                              |                 |         |
| Resistance to fungi Bacillus subtillis ATCC 27328                 | ASTM G-21                                                                                                                                                              |                 |         |
| Resistance to microorganisms Aspergillus niger                    |                                                                                                                                                                        |                 |         |
| FIRE TESTING                                                      |                                                                                                                                                                        |                 |         |
| Critical radiant flux                                             | ASTM E-648                                                                                                                                                             |                 |         |
| Fire retardancy                                                   | DIN-4102                                                                                                                                                               |                 |         |
| Flammability test                                                 | ASTM D-2859                                                                                                                                                            |                 |         |
| Surface flammability                                              | CPSC FF 1-70                                                                                                                                                           |                 |         |
| Smoke density                                                     | ASTM E-662                                                                                                                                                             |                 |         |
| STANDARD TESTING                                                  |                                                                                                                                                                        |                 |         |
| Static coefficient of friction                                    | ASTM C-1028                                                                                                                                                            |                 |         |
| Compression Set                                                   | ASTM D-395                                                                                                                                                             |                 |         |
| Effects of liquids- change in mass                                | ASTM D-471                                                                                                                                                             | Motor oil       | Max <1% |
|                                                                   |                                                                                                                                                                        | Hydraulic Fluid | Max <1% |
|                                                                   |                                                                                                                                                                        | Mineral oil     | Max <1% |
|                                                                   |                                                                                                                                                                        | Antifreeze      | Max <1% |
|                                                                   |                                                                                                                                                                        |                 |         |
| Hardness                                                          | ASTM D-2240                                                                                                                                                            |                 |         |
| Abrasion resistance                                               | ASTM D-3884                                                                                                                                                            |                 |         |
| Ozone Method A                                                    | ASTM D-1171                                                                                                                                                            |                 |         |
| Sustainability                                                    | <ul style="list-style-type: none"><li>• Recyclable material</li><li>• Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li></ul> |                 |         |