
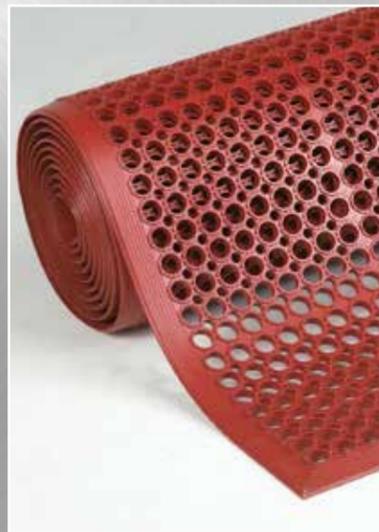


562RD Sanitop™ Red

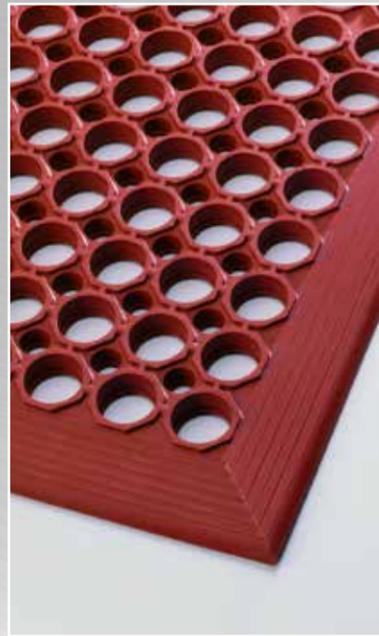

- This mat is grease resistant and its lightweight facilitates handling when cleaning.
- Drainage holes and raised studs provide aeration and allow fluids and debris to fall through, keeping the surface clear.
- Resilient rubber to provide fatigue relief, made of tough compound designed to yield a long service life.
- Designed to withstand harsh chemicals, this mat offers simple solutions to almost any industrial or foodservice application.
- Aggressive slip resistant surfaces.
- Free of silicone therefore safe for vehicle painting facilities.
- Ergonomic benefit of 12.7 mm thickness worker platform.
- Moulded bevelled edges on all 4 sides for trip resistant & easy cart access.

562RD Sanitop™ Red

PRODUCT SPECIFICATIONS		
Designation	Industrial Matting	
Type	Anti-fatigue / anti-slip	
Description	Duckboard, open ring mat with bevel edges	
Material	75% nitrile rubber compound, grease resistant	
Process	Compression moulding	
Category	Better	
Recommended use	Heavy duty – wet/dry industrial environments Food service, dairy and fish industry, abattoirs	
Colours	Red	
Weight	8 kg/m ²	
Thickness	12.7 mm	
Standard sizes	91 cm x 152 cm, 91 cm x 297 cm, 91 cm x 594 cm	
Custom sizes	N/A	
Special remarks		
PRODUCT TESTING		
Tests	Norms	Results
Foam battery	ASTM D3574	
Abrasion resistance	ASTM D3884-01	
	500 Cycles	
	1000 Cycles	1.2% weight loss
Static coefficient of friction	ASTM C1028-96	0.82
Elongation	ASTM D412	
Breaking load	ASTM D412	
Graves tear strength	ASTM D 1004	
Hardness	ASTM D2240-02	
Anti-slip	DIN 51130 and BG-RULE BGR181	
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.251.P.044985.07.09
MATERIAL ANALYSIS		
Compression Set @ 25%	ASTM D395	1.4 %
Compression deflection @ 25 %	ASTM D575	64.2 lb/in ²
Compression deflection @ 50 %	ASTM D575	212 lb/in ²
Standard method for rubber deterioration	ASTM D1171	No cracking
FIRE TESTING		
	Critical radiant flux	ASTM E-648
	Fire retardancy	DIN4102
		EN 13501-1
	Flammability test	ASTM D2859
		Pass
ESD	ANSI ESD S7.1 50% Humidity	
Sustainability	<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 	