
Newest technology in respiratory protection.

TECHNICAL DATA

Description	Powered Air Purifying Respirator	Туре	TH3P R SL filter for TH3P system (EU)	
	with integrated airflow-sensor and three selectable flow rates	Hose length	0.7 m (elastic up to 1.3 m)	
Protection level	Protection level TH3 (EN 12941)	Standards	EN 12941:1998/A2:2008,	
Flow rates	Level 1: min. 150 l/min Level 2: min. 200 l/min		AS/NZS 1716:2012, EAC: TP TC 019/2011	
	Level 3: min. 250 l/min	Notified body / Lic. No.	CE 1024, SAI Global, EAC	
Fuse	Electronic fuse	LIC. NO.		
Noise	max. 70dbA	Scope of delivery	Blower unit with hose, TH3P R SL filter, battery, fabric belt, charger, user	
Dimensions	222 x 213 x 92,6 mm (LxWxH)		instructions	
Weight	1.560 g (incl. filter, belt, and battery) 1.750 g (longlife-model with Power battery)	Warranty	2 years from date of sales for manufacturing and material defects, 6 months warranty for battery	
Color	green or blue			















liteflip autopilot

clearmaxx

opt swiss made optrel AG ndustriestrasse 2 CH-9630 wattwi www.optrel.con info@optrel.com

crystal 2.0 Item no. 4441.900

panoramaxx

e684 Item no. 4441.660 Item no. 4441.600 Item no. 4441.800 Item no. 4441.700 Item no. 4900.020

vegaview2.5





Buckle up & take a deep breath!



High-performance PAPR system with a Safety Class 3 filter

x

U





optrel.cor

Art. no. 9412.201.02

Automatically better welding

. optrel

Reliably protects its wearer from smoke, aerosol particles, and dust. The e3000 PAPR system.

Effective aeration and ventilation is generally necessary for all work areas. Room ventilation solutions are elementary, but not always sufficient. An additional local exhaust vent in the immediate vicinity of a work station is hard to bring about and also risks suctioning off valuable protective gases.

If each worker is to be comprehensively protected from hazardous particles, personal protective breathing equipment is indispensable.

The e3000 PAPR system allows optrel to guarantee

- the highest class of protection (TH3) from respirable particles (smoke, aerosol, and dust). Breathing air becomes cleaner by a factor of up to 500.
- even air distribution in the fresh air helmet.
- automatic air flow control.
- additional cooling effect for keeping a cool head about you.

Better working conditions for greater efficiency and





A rotary switch can be used to feed 20% of the air cooling the forehead area.


Air supply system with the highest comfort.



ITEGRATED. AUTOMATIC AIR OW CONTROL

Daily monitoring of air flow is prescribed for all respiratory devices available on the market. Conventional devices require manual checks. The optrel e3000's intelligent sensor management allows it to perform an automatic air flow check.

HIGH PERFORMANCE BATTERY



₹ Z	_	

20h

10h

MPLE OPERATION FOR LOW PERATING COSTS

The large pre-filter slows blockage of he TH3 particle master filter. This attribute and the innovative replacement concept for the filter and face seal allow the user to optimize the overall operating costs.

Respiratory protection of the highest safety class.

For rough environmental conditions, a highly efficient welding protection system is indispensable for ensuring that the welder's state of health allows him to continue to work. The optrel e3000 ventilated breathing system with its integrated particle filter of the highest class (TH3) reliably protects the welder's airways from smoke, aerosol, and dust when used in conjunction with an optrel PAPR welder's helmet.

It filters out 99.8 % of the respirable particles, such as the following:

- aluminum oxide
- iron oxide
- magnesium oxide
- barium compounds
- lead oxide
- fluorides

00%

- copper oxide
- manganese oxides
- molybdenum oxide
- vanadium pentoxide
- chrome (III) compounds
- chrome (IV) compounds



ADJUSTABLE AIR FLOW

The three-level adjustable air flow of 150-250 l/min in combination with the helmet ensures customized, comfortable air distribution. The highest level, 250 l/min, has an additional cooling effect for the user even under the hottest conditions.


This effect can be intensified by means of a rotary switch that diverts 20% of the cooling air to the forehead area. This allows the highest degree of concentration and reduces fatigue symptoms.



10UNTAIN BREEZE ODOR FILTER

Used in combination with the optrel e3000 ventilated breathing system, the mountain breeze filter increases the welder's comfort even more. It protects him from unpleasant odors during welding and grinding of coated material (such as galvanized sheet) and thus from nausea, headaches, and dizziness.

Main acces	sories	Art. Nr.	Main accessories	Art. Nr.
Coptroy	e3000 Tasche	8000.110	Hose protective	e sleeve, black 4551.021
Contraction of the second seco	optrel Rucksack	8000.100	optrel parking b	buddy 5002.900
	Charger e3000 with all primary connectors	4551.010	Hose guide	4551.024
	e3000 multibay charger for up to 6 e3000 batteries	4551.013	Shoulder harnes	ss 4551.040

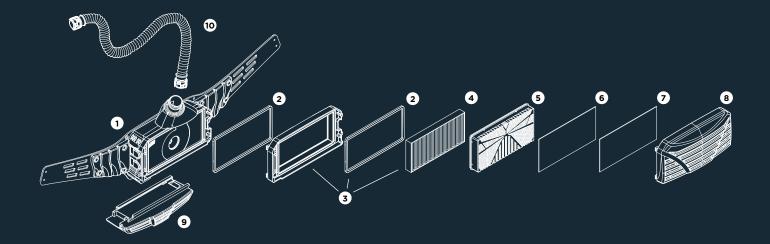



- nickel oxide - cobalt oxide
 - cadmium oxide

- zinc oxide

- titanium oxide

- beryllium oxide

Spare parts and accessories Art. Nr. 4551.00 1 e3000 PAPR - blue, 10h Battery e3000 PAPR - blue, 20h Power Battery 4551.00 e3000 PAPR - green, 10h Battery 4551.00 e3000 PAPR - green, 20h Power Battery 4551.000 2 Sealing Kit for e3000 4551.023 3 Starter Kit mountain breeze odor filter 4088.10

4088.10

- 4 Replacement Kit mountain breeze odor filter 4088.104
- 5 TH3 particle master filter

	Sp	pare parts and accessories	Art. Nr.	
	6	Pre-filter (50 pcs.)	4088.101	
-L .G	7	Spark protection (2 pcs.)	4088.102	
.G-L	8	e3000 filter cover blue e3000 filter cover green	4551.031 4551.031.G	
	9	Battery e3000, 10h Battery Battery e3000, 20h Power Battery	4551.011 4551.012	
	10	e3000 air hose	4551.020	